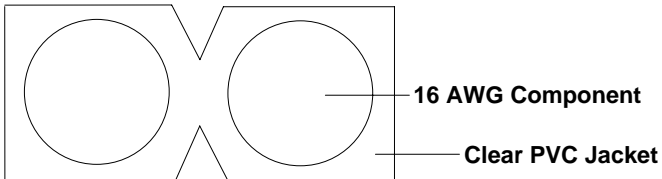



Product Specification Sheet

Catalog Number: 16-2C-ZIP-CLR

Construction Detail	Product Illustration
 <p style="margin-left: 200px;">16 AWG Component</p> <p style="margin-left: 200px;">Clear PVC Jacket</p>	
Physical Construction	Description
<p>Component 1: 16 AWG 7x23/38 oxygen free copper conductor PVC insulation: .026-inch nominal thickness</p>	<p>Zip style interconnect speaker wire for distributed audio applications and installations in non-UL rated applications.</p>
	Color Code
	<p>Insulation is clear One leg is printed "+" for positive One leg is printed "-" for negative</p>
	Electrical Specifications
	<p>16 AWG: DCR: 4.45 Ω per 1000 feet Capacitance: 16.9 pF per foot Voltage: 150V RMS Temperature: 0°C to 60°C</p>
<p>Final assembly: 2 of component 1 in a parallel lay (zip construction) PVC Jacket: .026-inch nominal thickness Final construction: .118-inch x .236-inch nominal OD Product Print Legend one leg: ++++++ LIBERTY High Definition 16 AWG OFC Speaker Cable ++++++ Continuous ----- on opposite leg</p>	Regulatory Specifications
	<p>This product is not rated. Not for in-wall use.</p>
Specification Control	Product Information
<p>Revision Date: 01/07/1997</p> <p>Liberty Wire & Cable specifications are subject to change without notice. Contact an account representative for current product specifications. Liberty Wire & Cable continuously strives to ensure product specifications are accurate and complete. All physical specifications are nominal.</p>	<p>Jacket Colors: Clear</p> <p>Packaging: 500 foot plastic spools, 50 foot plastic spools</p> <p>Special Note: Only sold as complete reels</p>